

TURBO

TLXIII TURBO

Telex and Data Switch

- **Designed to inter-work with or replace existing Telex and Data Switches**
- **Multi-Protocol support for migration to higher speed services**
- **SNMP Manageable**
- **Feature rich Telex support**
- **Ethernet 10Base-T port for IP network connectivity**
- **Scales to over 10,000 subscriber connections**
- **Extensive call detail records for billing and diagnostics**
- **Current Loop, FSK, and V.28/V.24 line interfaces**

The TLXIII Telex and Data Switch is a highly reliable, field proven telecommunications common carrier system designed to interwork with or replace existing telex and data switching networks throughout the world. Created to meet the demands of a modern telecommunications administration demanding the support of the existing telex network, and satisfying requirements for providing data services via the X.25 or IP data networks.

Serving as a multi-protocol stand-alone telex switching system, an international gateway exchange and/or concentrator, the TLXIII supports telex-to-asynchronous PAD, telex-to-X.25 real-time connections and telex to IP. These inter-working gateway features allow telex, packet network and IP traffic to be transported smoothly from one network to another, transparent to the end users of either network.

Administrators can employ the TLXIII Telex and Data Switch's flexible design to migrate subscribers from 50 baud telex service up to 300 to 64Kbps data service. The same pair of wires and switch port can be used, requiring only a change of the central site "modem," subscriber terminal equipment and the port's configuration.

Operating as a packet switch, the TLXIII meets and exceeds ITU X.25 recommendations. The system offers economical switching telex and data at capacities of more than 10,000 terminations. Distributed processing provides the system with added flexibility and more computing power per termination.

Housed in standard 19-inch enclosures, a system control cabinet contains the switching nodes and the terminal node cabinets house the terminal nodes, providing up to 1200 ports per cabinet. Multiple cabinets are used to build larger nodes.




Communication solutions from

NSGDatacom

extend. evolve. innovate.

Product Features

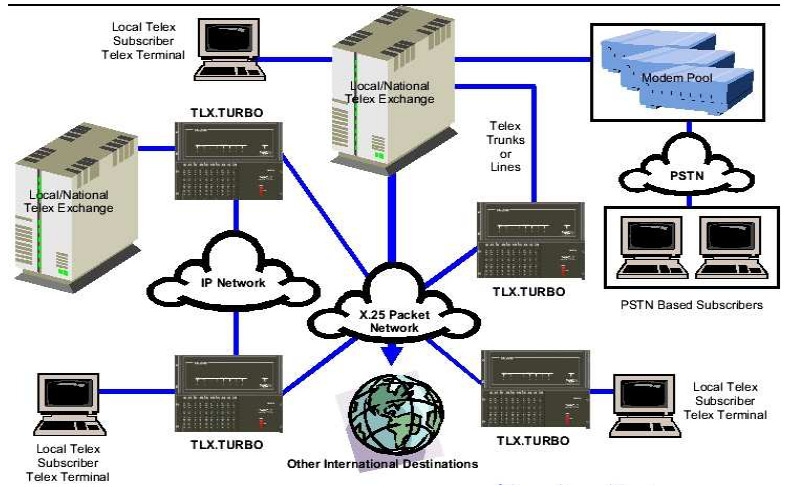

IP Features

- 10-Base-T TCI/IP Ethernet Interface
- RFC1490 IP over Frame Relay
- RFC1613 X.25 over IP
- IP Routing
- RIP (Version 1)
- Static Addressing
- X.121/Frame Relay/PPP to IP address mapping
- Telnet (Client and Server)
- SNMP Management

System Features

- Access Control Categories
- Automatic Call Redirection
- Barring
- Central Time Keeping System
- Closed User Groups
- Configurable PTS to include:
 - Date, Time Serial Number and Text
- Date/Time and AAB Processing
- Forced Release
- Number Change (NCH)
- Overnight Answerback Test
- Password Security for MMI
- Redundancy
- Regeneration
- Selective Line Monitoring
- Telex Intercept Processing
- Test Message FOXER
- User Friendly Man/Machine Interface

Routing Features

- Alternate Routing
- Alternate Routing on Receipt of Service Message
- Service Message
- Area Code Tables (5)
- Area Code Translation (Deletion/ Addition)
- Pick-a-Trunk
- Rotary of Route Selection

Subscriber Features

- Abbreviated Selection by Port/ Subscriber
- Abbreviated Selection Global "ALIAS"
- Absent Subscriber Indication
- Announcement Service
- Automatic Advice of Duration
- Automatic Call Forwarding
- Broadcast Calls
- Camp On (Automatic Retry)
- Collective = Subscriber PBX
- Group
- Date and Time Indication at Call
- Connect
- Department Billing
- Direct Call/Hotline
- Five Character Disconnects
- Follow-on Calls
- Information Service (Optional)
- Selection Error Correction
- Silent Call (IDLE) Monitoring
- Time of Delivery Indication

Reporting Features

- Alarm Reports
- Call Logging
- Dynamic System Status Monitoring

Signaling Features

- False Call Rejection
- Printed Service Messages
- Special Service Positions(s)
- Trunk Retest
- Two and Four Wire Neutral/ Polar/
- FSK Subscriber
- Type U.11 C Signaling
- Type CCITT U.1 A and B Signaling

Interfaces and Voltages

Size: 19" Rack Mountable

10 1/2" H x 19" W x 16" D

Input Power:

100-250 VAC, 47-63 Hz or 44-64 VDC

Heat: 400 BTUs per fully loaded system

Line Interface:

V.28/V.24 EIA RS-232C Standard

Optional external line converter for:

V.21/Bell 103

+/- 65 VDC Current Loop

Internal or External Loop Battery

Supply

NSGDatacom

www.nsgdata.com

3863 Centerview Drive, Suite 100
 Chantilly, VA, 20151-3232 USA
 Phone: +(1) 703 793 2000
 Fax: +(1) 703 793 2001

7435 New Technology Way
 Frederick, MD, 21703 USA
 Phone: +(1) 301 662 5926
 Fax: +(1) 301 694 6279

The Brackens, London Road
 Ascot, Berkshire SL5 8BE, UK
 Phone: +(44) 1344 893 000
 Fax: +(44) 1344 891 990

903 Technology Center, 651 King's Road
 North Point, Hong Kong
 Phone: +(852) 2515 1700
 Fax: +(852) 3527 7077